

PRESS RELEASE

Lux Elements expands product range

Leverkusen, 01.02.2022
Page [1 / 5]

Extra-flat shower bases with integrated drainage technology in many new formats

When renovating a bathroom in an old building, a flush-with-the-floor shower is often desired, even though the existing installation height of the floor is too low for the installation of the drain technology. The Tub-Combi-S shower base system solves this problem thanks to its very flat design and also impresses with a good drainage capacity. This product will be offered in many new standard formats from 2022 onwards.

The extra-flat Tub-Combi-S models with prefabricated slope are the combination of a sealed hard foam shower base (DIN 18534, Part 6, AIV-P) and a horizontal drain. The shower bases are only 65 mm high at the outer edges and only 55 mm high at the floor drain.

Choice of standard or design grate

The built-in horizontal DN 40 floor drain has a good drainage capacity of 48 litres/minute. New: from 2022 onwards, the grate fitting frame including standard or design grate can be chosen from a comprehensive range of items, dependent on the covering thickness. Tileable grate versions are thus also possible.

Many new formats – also as bathtub replacement

The over 20 new square and rectangular standard formats also include three Tub-Combi-S Bol models for the replacement of bath tubs with a

PRESS RELEASE

length of 1800 mm and widths of 800, 900 and 1000 mm. These consist of a shower area with a slope and an area without a slope that can be cut to any desired size. If you're looking for a matching bench seat, you'll find that also in the "Bathroom and shower" range from Lux Elements.

Leverkusen, 01.02.2022
Page [2 / 5]

Bespoke manufacturing of the Combi-S is also possible under the designation "Plus".

More information and product data can be downloaded at:

https://www.luxelements.com/lux_en/programm/tub/duschtasse-combi.htm

Information:

Lux Elements GmbH & Co. KG


Barbara Steinhöfer

E-mail: b.steinhoefer@luxelements.de

Phone +49 (0) 21 71/72 12 15

PRESS RELEASE

Leverkusen, 01.02.2022
Page [3 / 5]

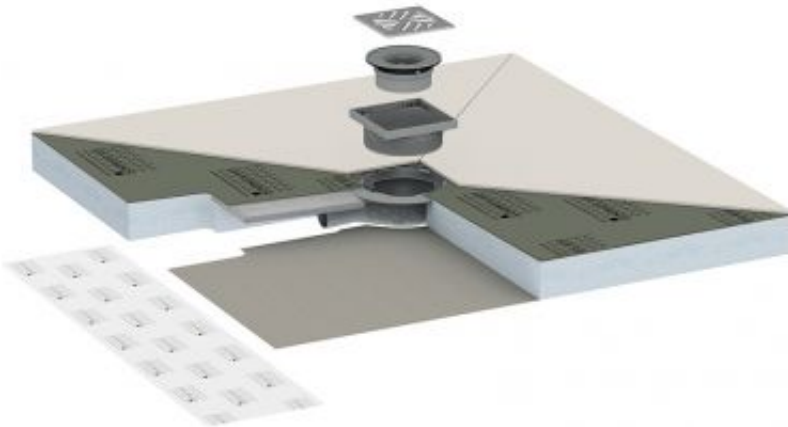

The assembly shows (from bottom to top):
sealing sleeve, DN40 floor drain system, plastic reinforcement, shower base
element, grate fitting frame and grate

TELECHARGEMENT:

- > TUB-COMBI-S_Aufbau_3C [194 KB]
- > TUB-COMBI-S_Aufbau_4C [2,7 MB]

PRESS RELEASE

Leverkusen, 01.02.2022
Page [4 / 5]



TELECHARGEMENT:

- > TUB-COMBI-S_Ambiente_3C [870 KB]
- > TUB-COMBI-S_Ambiente_4C [8,7 MB]

PRESS RELEASE



Leverkusen, 01.02.2022
Page [5 / 5]

TELECHARGEMENT:

- > [TUB-COMBI-S_BOL_Ambiente_3C \[488 KB\]](#)
- > [TUB-COMBI-S_BOL_Ambiente_4C \[7,1 MB\]](#)